


Silicone Release Liner

BK1



Utilized atmospheric-corrosion protective silicone, this grade is of light release. Having the most basic composition, it is suitable for single-sided or double-sided application on various substrate sheet.

Components

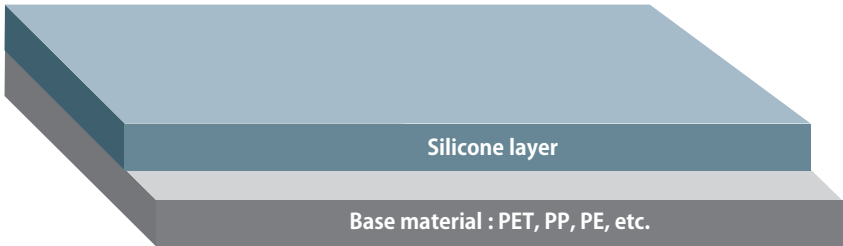

Physical property data

Properties	Unit	Typical value
Peel strength [31B method]	mN/50mm	110
Peel strength [502 method]	mN/50mm	160
Residual adhesion rate	%	95

Peel strength measuring method

31B method : Nitto tape No.31B／0.3 m/min／180 degrees peel／after left at room temperature for 2 hours (tape peel).
502 method : Nitto tape No.502／0.3 m/min／180 degrees peel／after left at temperature of 50 degrees C under load of 20 g/cm² for 20 hours.

Subsequent adhesion measuring method

Nitto tape No.31B／0.3 m/min／180 degrees peel／after left at temperature of 50 degrees C under load of 20 g/cm² for 20 hours.

※ The values in the table are not guaranteed values but representative values.
※ The values in the table are measured with 75 μm liners.



Fujiko Co.,Ltd.



+81-877-28-6111
+81-877-28-6114

284-2 Minamiko, Kawanishi-cho, Marugame-shi,
Kagawa-ken, Japan 763-0092

